

09-22-00

A

09/21/00
JC849 U.S. PTO

MERL-1274

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC760 U.S. PTO
09/666757
09/21/00

"EXPRESS MAIL" mailing label number EL031856521US
Date of Deposit: Sept. 21, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Kelli J. Withrow
Printed name of depositor

Kelli J. Withrow
Signature of depositor

* * *

TRANSMITTAL LETTER

The Assistant Commissioner for Patents
Washington, D.C. 20231

ATTN: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of:

INVENTORS: William S. Yerazunis
Darren L. Leigh

FOR: ELECTRONIC DISPLAY WITH COMPENSATION FOR SHAKING

Enclosed are:

- [12] pages of specification, claims and abstract
- [4] sheets of formal drawings
- [X] Declaration and Power of Attorney
- [X] Assignment of the application to Mitsubishi Electric Information Technology Center America, Inc. (ITA)
- [X] Information Disclosure Statement
- ☐ Preliminary Amendment
- ☐

The filing fee is calculated as follows:

09/21/00 09/21/00

	CLAIMS AS FILED			
	NUMBER FILED	NUMBER EXTRA	LARGE ENTITY	AMOUNT
Basic Fee	9	0	\$ 690.00	\$ 690.00
Total Claims	9	-20 =	x18.00	
Independent Claims	1	-3 =	\$78.00	
Assignment Recording Fee			40.00	40.00
Multiple Dependent Claim Fee			260.00	
Other				
TOTAL FEE				\$ 730.00

- [X] Please record the accompanying Assignment.
- [X] Please charge Deposit Account No. 50-0749 in the amount of \$730.00.
- [X] The Assistant Commissioner for Patents is hereby authorized to charge any additional fees due or credit any overpayment to Deposit Account No. 50-0749.

All future correspondence should be addressed to:

Patent Department
Mitsubishi Electric Research Laboratories, Inc.
201 Broadway
Cambridge, Massachusetts 02139

Duplicate copies of this letter are enclosed.

Respectfully submitted,
Mitsubishi Electric Research Laboratories

By: 

Dirk Brinkman
Reg. No.: 35,460
Attorney for Assignee

Mitsubishi Electric Research Laboratories, Inc.
201 Broadway
Cambridge, Massachusetts 02139
(617) 621-7539

EXPRESS MAIL number: EL031856521US

Date of Deposit: Sept. 21, 2000

I hereby certify that this paper is being deposited with the United States Postal Service "EXPRESS MAIL Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents; Washington, DC 20231.

Kelli J. Withrow

Typed name of person mailing paper or fee

Kelli J. Withrow

Signature



=====

APPLICATION FOR UNITED STATES LETTERS PATENT

=====

Title: ELECTRONIC DISPLAY WITH COMPENSATION FOR SHAKING

Inventors: William S. Yerazunis
Darren L. Leigh

Electronic Display with Compensation for Shaking

Field of the Invention

The present invention relates generally to electronic display devices, and more particularly to compensating the output while shaking the devices.

5

Background of the Invention

Numerous techniques are known to detect shaking in cameras and to stabilize the acquired images when shaking is detected. Many of these techniques use accelerometers. U.S. Patent 5,448,510 "Camera shake detection apparatus" issued to Murakoshi on May 15, 1984 sounds an alarm when excessive shaking might result in a blurred image. U.S. Patent 5,758,202 "Camera capable of reducing image blur" to Amanuma et al. issued on May 26, 1998. Accelerometers have also been used to prevent damage due to shaking in disk drives in portable computers, U.S. Patent. Other systems where vibrational noise is reduced include towed sensor arrays, U.S. Patent 5,528,555. All of these devices deal with the problem of reducing noise due to shaking in input type of devices.

There is also a need to reduce effects due to shaking in output devices such as electronic displays, e.g., CRTs, LCD panels, LEDs, plasma displays, and the like. Particularly now that a large number of these devices are used in mobile electronic appliances such as cellular phones laptops, hand-held computers, digital display devices in cars, buses, trucks, planes, and boats. It is difficult to read these displays under shaky conditions.

25

Therefore, there is a need for apparatus and methods for testing the shock and vibrational loads imposed on display devices and to compensate for this shaking. This need exists particularly for display devices used in mobile electronic appliances.

5 **Summary of the Invention**

A display device includes a display screen, and horizontal and vertical display signals. The horizontal and vertical display signals are used to render an image on the display screen. A first and second accelerometers are mechanically coupled to the display screen. First and second compensation circuits convert acceleration in horizontal and vertical directions respectively to x- and y-compensation signals. First and second adders combine the x- and y-compensation signals with the horizontal and vertical display signals to dynamically adjust a location of the image on the display screen while the display device is subject to movement.

In a first embodiment, the display signals are deflection signals of a cathode ray tube and the compensation circuits operate in an analog mode. In a second embodiment, the display signals are address signals of a digital display panel, and the compensation circuits operate in a digital mode. In a third embodiment, a predictive controller is included, to model and anticipate the movement of the display device.

Brief Description of the Drawings

Figure 1 is a block diagram of a display device according to a first embodiment of the invention;

Figure 2 is a block diagram of a display device according to a second embodiment of the invention;

Figure 3 is a block diagram of a display device according to a third embodiment of the invention; and

Figure 4 is a flow diagram for a predictive method used by the device of Figure 3.

Detailed Description of Preferred Embodiments

Figure 1 shows a preferred embodiment of a display device 100 that compensates for shaking and vibration. The display device is particularly suited for use in mobile environments, or in environments where there is a lot of vibration, for example display systems integrated into industrial machinery.

The display device 100 according to the invention includes a cathode ray tube (CRT) 101 that can display an image 102. The image is generated via horizontal and vertical deflection circuits 103-104. The deflection circuits can be derived from television signals, e.g., NTSC or HDTV, or via a display buffer and a graphics generator in a computer system, not shown.

The invention corrects for the shaking or vibration by using an x-motion compensation circuit 10 for a horizontal deflection signal (H_{in}) 105, and a y-motion compensation circuit 11 for a vertical deflection signal (V_{in}) 106. Each motion compensation circuit performs in a like manner.

The compensating signals are respectfully derived from accelerometers 110. The x- and y-accelerometers are mounted at right angles to each other and are coupled in a fixed relationship to the display screen. For example, they are mechanically attached to the display device 101, or the housing in which the CRT is mounted so that motion
5 can be directly detected. The accelerometer can be implemented using the ADXL-202 from Analog Devices, Inc.

The output from each accelerometer 110 is passed through a first band-pass filter 112. The purpose of the first filter is to prevent signal drift due to zero-point (DC)
10 errors. Therefore, the low-end cut-off of the band-pass filter blocks any frequencies less than one half cycle per second. Also, since the refresh rate for the image is typically limited to 30 or 60 frames per second, the high end cut-off of the filter blocks frequencies higher than the image refresh rate.

Next, the filtered signal is presented to a first integrator 114. The first integrator derives velocity from acceleration. The output from the first integrator can be passed through a second band-pass filter 116, particularly if a finite precision integrator is used. The output of the second integrator is presented to a second integrator 118 to derive position from velocity. The output of the second integrator can be passed
20 through a third band-pass filter 120. The second and third filters can be like the first, and perform like functions, that is, to filter drift and low-frequency noise, and to have the sampled signal not exceed the Nyquist frequency of the display device.

The outputs of the third filters can be passed through optional gain control circuits
25 122 to respectively form x- and y-compensation signals (H_{delta} , V_{delta}) 107-108. The compensation signals are combined with the deflection signals in adders 126. The

compensated deflection signals (H_{out} , V_{out}) are fed directly to the deflection coils 130 of the CRT 101.

The net effect of the compensation circuits is to hold the image 102 stable, with respect to the viewer 109, while the display device is shaken or subject to vibration such as is experienced in mobile applications or vibrating environments.

It should be noted that an additional z-motion compensation circuit can be added to account for shaking in the z-direction. In this case, the angular extent of the image, as perceived by the user, is held steady by adjusting the vertical and horizontal size signals as the display moves in and out.

In an alternative embodiment for digital devices, a display device 201 is a LED array or a LCD panel. In this type of display, pixels in a display memory 250 are selected by x- and y-address select signals derived from a digital processor 240. The compensation circuits here include accelerometers 210. The outputs of the accelerometers are converted to digital signals by the A/D converters 220. The remainder of the compensation circuits 220 operates as described above, except now using digital circuits to filter and integrate acceleration to obtain distance. The compensating x and y signals 207-208 are respectively added 330 to the select signals 241-242 to correctly address the display memory with motion compensation.

For example, if a pixel at [73, 107] would be the next pixel addressed under a steady state condition, and motion has caused the display to move by [+3, +5] pixel units, then the compensated address select signal is [76, 112]. That is, in general:

$$x_{out} = x_{in} + x_{delta} \text{ and } y_{out} = y_{in} + y_{delta}$$

5

If the vibration is periodic, then it is possible to predict where the display will be located in near future times. Thus, it becomes possible to predetermine the compensation signals for a next frame while displaying a previous frame.

10

13

20

25

data by the appropriate offset to compensate for this. At the calculated instant, illuminate the display, usually by flashing the LEDs for the low duty cycle. This method can provide the effects of sub-pixel shifting without the computational expense of the calculation.

5

Figure 3 shows the embodiment where a predictive controller 320 is used to dynamically generate adaptive correction signals 307-308. In this case, the output of the compensation circuits 310, 320 is presented to the predictive controller 320. The signals are stored in a memory 321. The signals are analyzed over time to build a model 322 that predicts anticipated motion. This is particularly useful where the motion is repetitive, or faster than the refresh rate of the display device 301 because in this case, the compensation signals 307-307 for the adders 304-305 can be adjusted ahead of time using the model 322.

10

15

Predictive Method

Given that the shaking can be expressed as a bandlimited signal composed of multiple sinusoids and possibly noise, the following method, as shown in Figure 4, allows the controller 320 to predict compensation signals for near future times.

20

In step 410, sample the bandlimited shaking signal 401. The sampling rate should be at least twice the highest frequency in the shaking signal in order to comply with the Nyquist sampling theorem. Collect at least N samples, where N is the sampling rate times the reciprocal of the lowest frequency of the bandlimited signal. Multiply the samples by a proper window function, such as a raised cosine.

25

In step 420, perform a discrete Fourier transform (DFT) on the windowed samples.

In step 430, convert the transformed samples, which are complex numbers, into polar coordinates. This yields the magnitude and phase of the spectrum of the original signal.

5

In step 440, locate all spectral peaks whose magnitude is above some predetermined threshold. The threshold can be chosen to be smaller than the allowable error of the desired prediction. If the noise statistics of the original samples are known, then the threshold should be set to be above the noise level at each bin to minimize the effect of the noise on the peaks. Label these peaks I through M .

10

In step 450, for each peak, find its magnitude “ ρ ”, phase “ θ ” and frequency “ f ”. If the noise statistics of the original samples are known, then estimate the values of “ ρ ,” “ θ ,” and “ f ” using standard probabilistic techniques such as Maximum Likelihood estimation, see Papoulis, *Probability, Random Variables and Stochastic Processes*, McGraw-Hill, Inc., Third Edition, pp. 260 et seq., 1991. Multiply “ ρ ” by a correction factor to compensate for attenuation caused by the window function.

In step 460, using all of the triples “ ρ ,” “ θ ,” and “ f ”, determine:

20

$$x(t) = \sum_{i \rightarrow M} \{r_i \times \cos(2 \times \pi \times f_i \times t + \theta_i)\},$$

where ρ_i , θ_i , and f_i are the parameters of the i th peak from step 440. The value $x(t)$ 409 is an estimate of the original signal for times t during and after the original collection of samples. Time $t = 0$ corresponds to the time of the first sample.

25

Although the invention has been described by way of examples of preferred embodiments, it is to be understood that various other adaptations and modifications

may be made within the spirit and scope of the invention. Therefore, it is the object of the appended claims to cover all such variations and modifications as come within the true spirit and scope of the invention.

Claims

- 1 1. A display device including a display screen, and horizontal and vertical
2 display signals, the horizontal and vertical display signals to render an image
3 on the display screen, comprising:
4 a first and second accelerometers mechanically coupled to the display
5 screen;
6 a first and second compensation circuits to convert acceleration in
7 horizontal and vertical directions respectively to x- and y-compensation
8 signals;
9 first and second adders combining the x- and y-compensation signals
10 with the horizontal and vertical display signals to dynamically adjust a
11 location of the image on the display screen while the display device is
12 subject to movement.
- 1 2. The display device of claim 1 wherein the display screen is a cathode ray
2 tube and the compensation circuits operate in an analog mode.
- 1 3. The display device of claim 2 wherein the display signals are deflection
2 signals for the cathode ray tube.
- 1 4. The display device of claim 1 wherein the display screen is a digital
2 screen.
- 1 5. The display device of claim 4 wherein the display signals are address
2 signals for a frame buffer of the digital screen.

1 6. The display device of claim 1 wherein each compensation circuit further
2 comprises:

3 a first and second integrator to convert acceleration to position; and
4 at least one band-pass filter.

1 7. The display device of claim 6 wherein a low frequency cut-off of the band
2 pass filter is less than one half cycle per second, and a high frequency cut-off
3 is less than a refresh rate of the display screen.

1 8. The display device of claim 1 wherein each compensation circuit includes
2 a gain control circuit.

1 9. The display device of claim 1 further comprising a predictive controller to
2 anticipate the movement.

Abstract of the Disclosure

A display device includes a display screen, and horizontal and vertical display signals. The horizontal and vertical display signals are to render an image on the display screen. A first and second accelerometers are directly coupled to the display screen. First and second compensation circuits convert acceleration in horizontal and vertical directions respectively to x- and y-compensation signals. First and second adders combine the x- and y-compensation signals with the horizontal and vertical display signals to dynamically adjust a location of the image on the display screen while the display device is subject to movement.

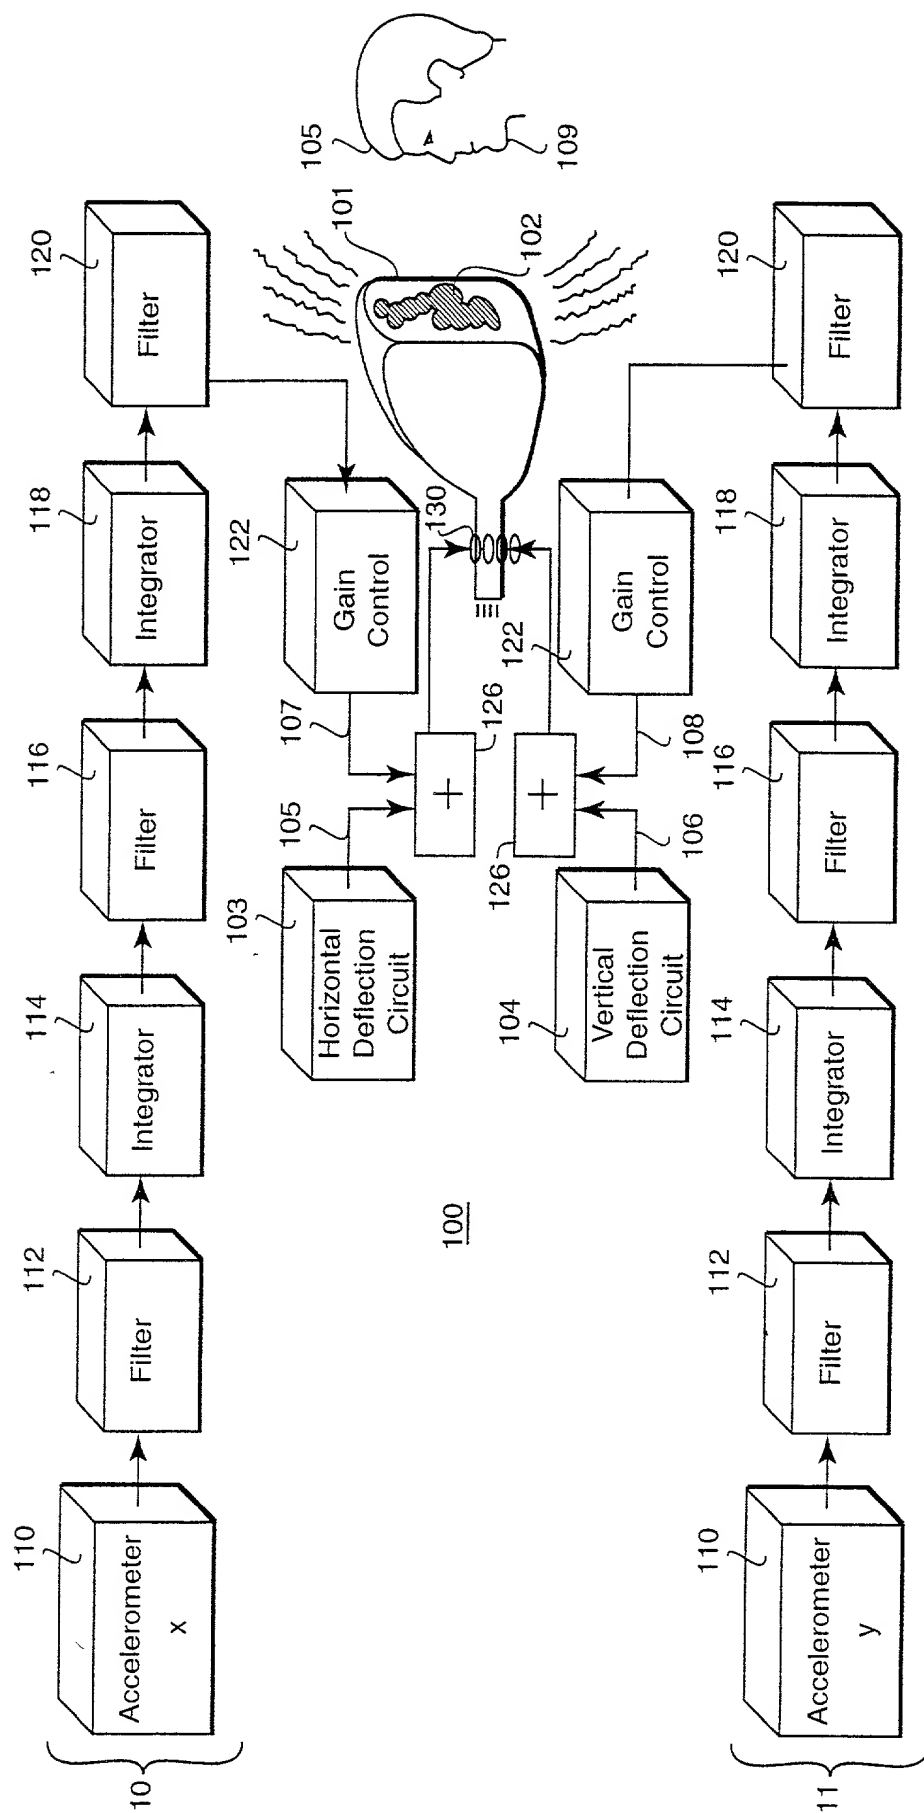


FIG.1

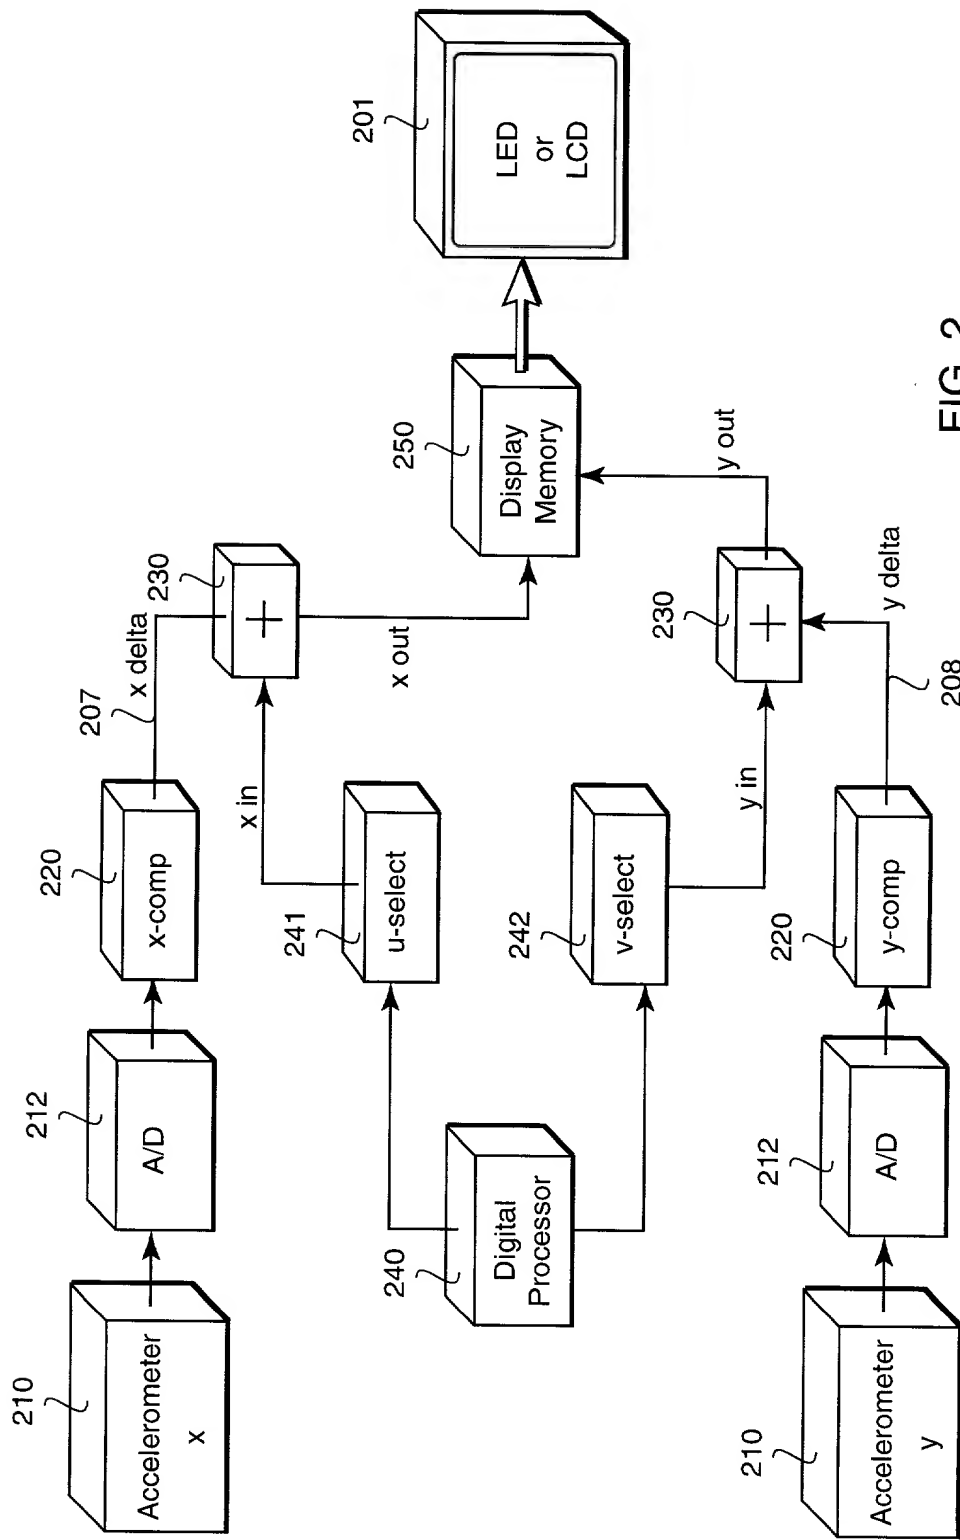


FIG. 2

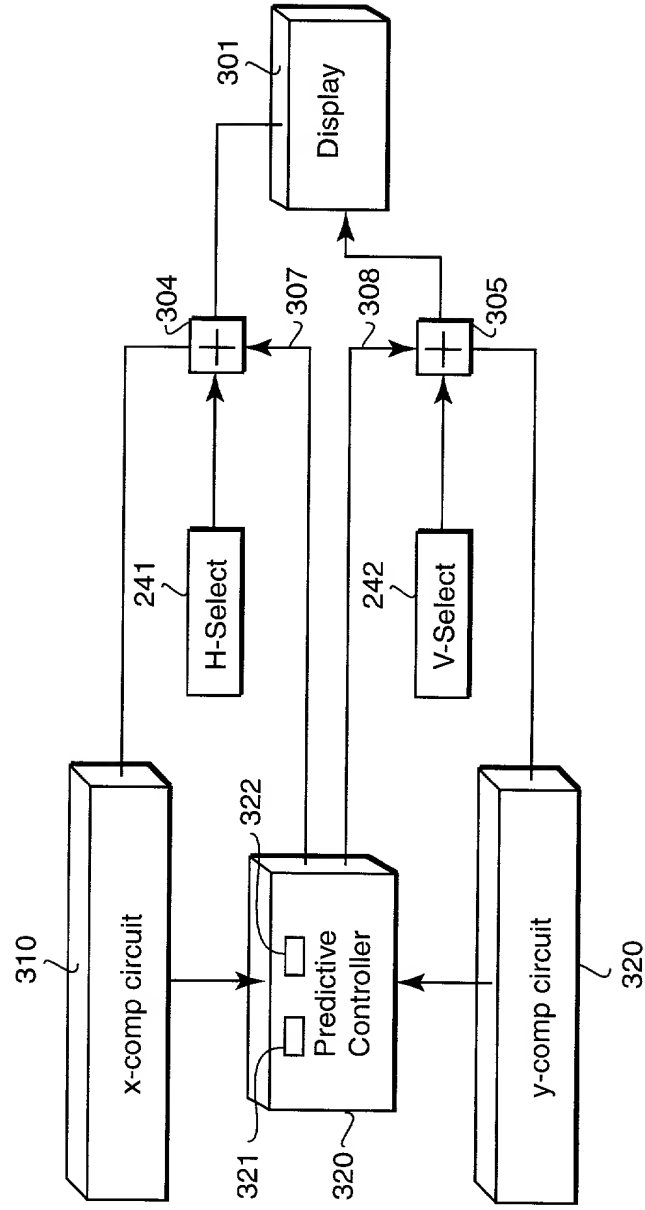


FIG. 3

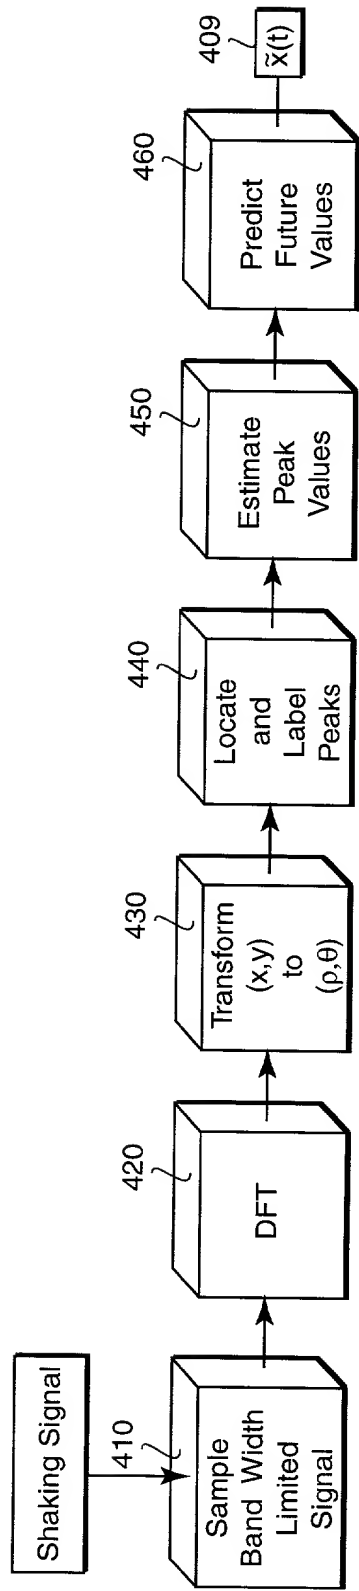


FIG. 4

DECLARATION AND POWER OF ATTORNEY

DECLARATION:

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe, the below named inventors are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention for ELECTRONIC DISPLAY WITH COMPENSATION FOR SHAKING, the specification of which is attached hereto unless the following box is checked.

☐ was filed on > as Application Serial Number > and was amended on > (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATIONS

Number	Country	Date Filed	Priority Claimed (Yes/No)
>	>	>	>
>	>	>	>
>	>	>	>

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States Provisional application(s) listed below.

APPLICATION NUMBER	FILING DATE
>	>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATIONS

Application Serial Number	Filing Date	Status
>	>	>
>	>	>

I hereby declare that all statements made of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY:

On behalf of Mitsubishi Electric Information Technology Center America, Inc., Assignee of my entire right, title and interest, I hereby appoint the following attorney with full power of substitution to act exclusively for Mitsubishi Electric to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Dirk Brinkman, Reg. No. 35,460.

All correspondence should be addressed to:

Patent Department
Mitsubishi Electric Research Laboratories, Inc.
201 Broadway
Cambridge, Massachusetts 02139

MERL-1274

All telephone calls should be directed to Dirk Brinkman,
telephone number (617) 621-7539.

Inventor's Full Name:	William S. Yerazunis
Inventor's Signature:	<i>[Handwritten Signature]</i>
Date:	9-21-2000
Residence: (City, State and/or country)	24 Nash Road Acton, MA 01720
Citizenship:	United States of America
Post Office Address:	24 Nash Road Acton, MA 01720

Inventor's Full Name:	Darren L. Leigh
Inventor's Signature:	<i>[Handwritten Signature]</i>
Date:	9/21/2000
Residence: (City, State and/or country)	47 Cross Street Belmont, MA 02478-3168
Citizenship:	United States of America
Post Office Address:	47 Cross Street Belmont, MA 02478-3168

001260 75293360